



### Flux Distribution (Type V):


LUMENS	DOWNWARD	UPWARD	TOTALS
HOUSE SIDE	1,152	130	1,282
STREET SIDE	1,159	127	1,268
<b>TOTALS</b>	<b>2,311</b>	<b>257</b>	<b>2,568</b>

### Specifications:

- Power Source:** 120-277 VAC @ 60 Hz
- Rated Power:** 44 Watts
- Comparable:** 175 Watt HID
- Power Factor:** > .9
- Luminaire Efficiency:** 84%
- Luminaire Efficacy:** 58.4 Lumens/Watt
- Operating Temperature:** -28° C to 70° C
- Color Temperature:** 6000°K
- Size:** Customer-dependent
- Mounting Height:** per customer's configuration
- Weight:** 120V – 24lbs; 277V – 30lbs
- Rated LED Life (Installed @ 25°C):** > 100,000 hours

### Features:

- Field-serviceable RCLED® Design
- Water-resistant/Dust-resistant
- Environmentally Friendly, contains No Mercury
- Patent Pending
- 5 Year Warranty
- Made in USA
- Compliant with UL-1598, UL-8750; UL Pending

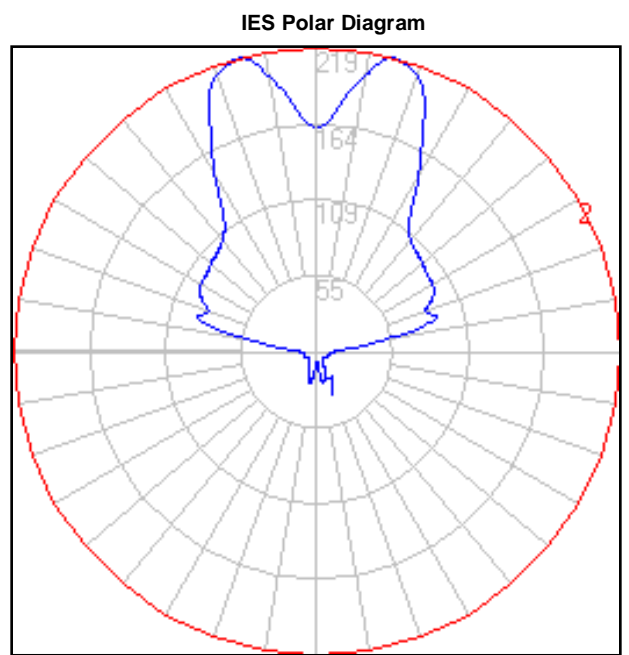

### Ordering Information:

Model	Series	Design	Voltage	Pattern Type	Power mA
LP2	01	2500	1		450
			120-277V	3 – III 5 – V	

V3.11102010