

IES Road Report Isolines (Type III)



**Specifications:**

- Power Source:** 120 / 277 VAC @ 60 Hz
- Rated Power:** 59 Watts Standard
- Comparable:** 70, 100, 150 and 175 Watt HID Fixtures
- Power Factor:** .997\*
- Luminaire Efficiency:** 85%
- Luminaire Efficacy:** 72.0 Lumens/Watt\*
- Operating Temperature:** -20° C to 70° C
- Color Temperature:** 6499°K\*
- Size:** 17.5" x 15.5" x 6.75"
- Fixture:** Formed Aluminum and Acrylic
- Mounting Height:** 20' – 30'
- Weight:** 17lbs
- Rated LED Life (Installed @ 25°C):** > 100,000 hours
- Compliance:** FCC Part 15, Subpart B, Class A & B;  
 IEEE C62.41.2 (Certified Lab Reports Available)

\*Per LM-79 #18078 (PL1-02-5200-1-3)

**Features:**

- Fits standard 1.5 to 2.75 inch OD, +/- 45° adjustable
- Field-serviceable RCLED® Design
- Water-resistant/Dust-resistant
- Environmentally Friendly, contains No Mercury
- Patent Pending
- 5 Year Warranty, Made in USA
- Compliant with UL-1598, UL-8750; UL Listed

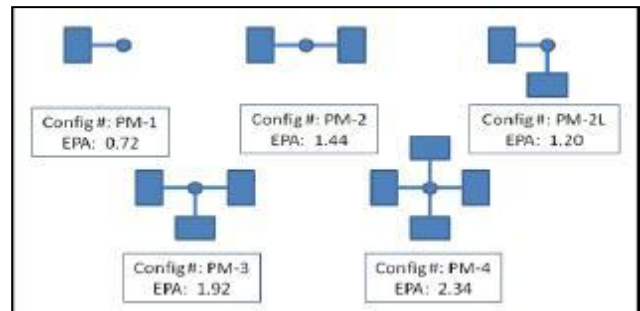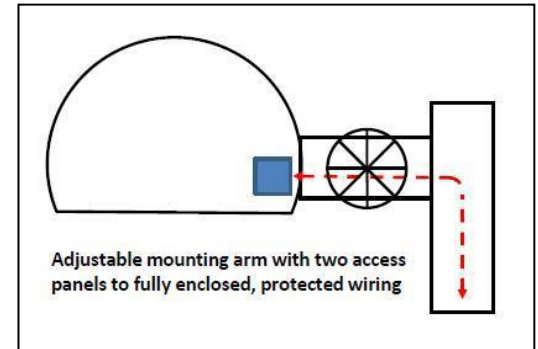

Engineering Data, by mounting configuration (Aero Housing)

**Ordering Information:**

Model	Series	Design	Voltage	Pattern Type	Mounting Size (OSD)	Housing Type	Housing Color
SL3	02	5200					
			1 – 120V 2 – 277V	3 – Type III 5 – Type V	1 – 1.50" 2 – 2.00" 3 – 2.50" 4 – 5" Sq.	ST – no skirt AE – Aero	AN – Anodized WH – White BL – Black BR - Brown

V14.11102010