

Specifications:

- Power Source:** 120 / 277 / 480 VAC @ 60 Hz
- Rated Power:** 114 Watts
- Comparable:** 400W MH / 6-Lamp T5
- Power Factor:** > .9
- Luminaire Efficiency:** 85%
- Luminaire Efficacy:** 85 Lumens/Watt*
- Operating Temperature:** -25° C to 70° C
- Color Temperature:** 6000°K
- Size:** 6.25”H x 7.0”W x 48”L
- Fixture:** Formed Aluminum
- Mounting Height (HB):** 30’ – 50’
- Mounting Height (HB):** 20’ – 30’
- Mounting Height (LB):** 13’ – 20’
- Weight:** 14lbs
- Rated LED Life (Installed @ 25°C):** > 100,000 hours

Features:

- Field-serviceable RCLED® Design
- Environmentally Friendly, contains No Mercury
- Made in USA: US and foreign patents
- 5 Year Warranty

Ordering Information:

Model	Series	Design	Voltage	Mounting Height
HB2 LB2	02	9000	1-120V 2-277V 3-480V	1: 13-20' (LB only) 2: 20-30' 3: 30-50'

lighting facts™
A Program of the U.S. DOE

Light Output (Lumens) 9667
Watts 114
Lumens per Watt (Efficacy) 84

Color Accuracy 74
Color Rendering Index (CRI)

Light Color 6027 (Daylight)
Correlated Color Temperature (CCT)


2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: 364W-SACKG6
Model Number: HB2-02-9000-1
Type: Surface-mounted downlight

DOE Lighting Facts Label

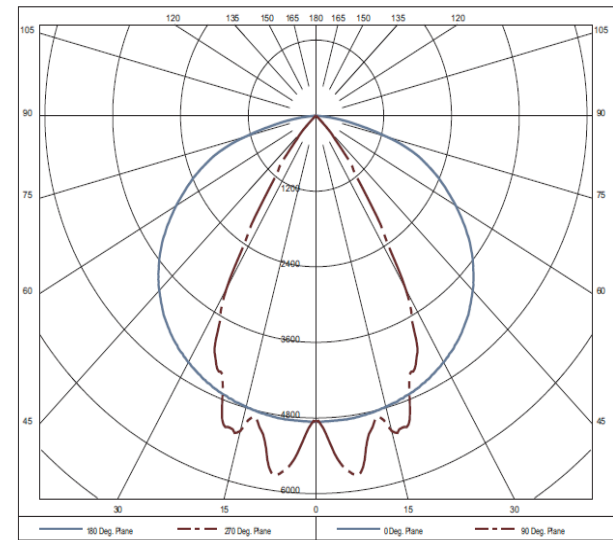

IES Polar Diagram (Highbay)

V5.11102010