



Dynasty® Z BA10 LED Candelabra Lamp

The Dynasty® Z Candelabra LED Lamp is an extension of Dynasty® Candelabra series with improved performance. Designed for a 120 or 240 VAC, 50 to 60Hz universal power system, they can be installed into any standard E12 or E14 socket. They are designed with CAO Group's patented Dynasty® Z High Flux LEDs, which are energy efficient, vibration resistant and features a multi-directional beam pattern, making it ideal for general lighting and decorative lighting applications. For more Dynasty lighting products, **Look for the Butterfly!**

Applications

- Chandeliers
- Wall sconces
- Carriage lights
- Vanity lights

Benefits

- Up to 90% energy cost savings
- Reduces maintenance costs
- 4 year warranty
- Environmentally safe, RoHS compliant
- Low carbon footprint

Features


- Vibration resistant
- Equivalent to a 25 watt incandescent lamp
- 120/240 VAC input
- Unique Butterfly-Beam™ (360° horizontal and 275° vertical)
- Exact BA10 footprint/shape



Specifications

Product #	Description	Bulb	Base	Watts	Volts	Power Factor	Amps	Lumens	CRI	Efficacy	CCT	Warranty
31021-27	Candelabra, LED, 3W, white 2700 K Clear, E12	Clear	E12	2.3W±10%	100/240 VAC 50 - 60 Hz	0.60	0.036	150	>80	65	2700 K	4 Years
31021-35	Candelabra, LED, 3W, white 3500 K Clear, E12	Clear	E12	2.3W±10%	100/240 VAC 50 - 60 Hz	0.60	0.036	150	>80	65	3500 K	4 Years
31021-50	Candelabra, LED, 3W, white 5000 K Clear, E12	Clear	E12	2.3W±10%	100/240 VAC 50 - 60 Hz	0.60	0.036	150	>80	65	5000 K	4 Years
31022-27	Candelabra, LED, 3W, white 2700 K Frosted, E12	Frosted	E12	2.3W±10%	100/240 VAC 50 - 60 Hz	0.60	0.036	140	>80	60	2700 K	4 Years
31022-35	Candelabra, LED, 3W, white 3500 K Frosted, E12	Frosted	E12	2.3W±10%	100/240 VAC 50 - 60 Hz	0.60	0.036	140	>80	60	3500 K	4 Years
31022-50	Candelabra, LED, 3W, white 5000 K Frosted, E12	Frosted	E12	2.3W±10%	100/240 VAC 50 - 60 Hz	0.60	0.036	140	>80	60	5000 K	4 Years
31023-30	Candelabra, LED, 1W, white 3000 K Clear, E12	Clear	E12	1.2W±10%	100/240 VAC 50 - 60 Hz	0.52	0.022	75	75	63	3000 K	4 Years
31023-50	Candelabra, LED, 1W, white 5000 K Clear, E12	Clear	E12	1.2W±10%	100/240 VAC 50 - 60 Hz	0.52	0.022	80	75	67	5000 K	4 Years
31024-30	Candelabra, LED, 1W, white 3000 K Frosted, E12	Frosted	E12	1.2W±10%	100/240 VAC 50 - 60 Hz	0.52	0.022	70	75	58	3000 K	4 Years
31024-50	Candelabra, LED, 1W, white 5000 K Frosted, E12	Frosted	E12	1.2W±10%	100/240 VAC 50 - 60 Hz	0.52	0.022	75	75	63	5000 K	4 Years

Mechanical Dimensions

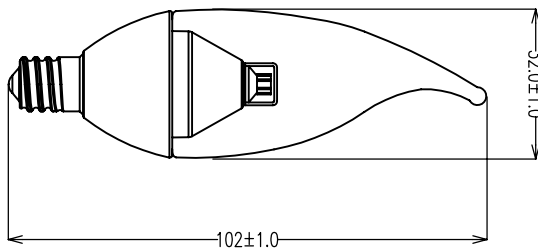

Dimensions	Description	Inches	mm
LCL	Light Center Length	2.50±0.04	55.0±1.0
DIA	Maximum Diameter	1.79±0.04	32.0±1.0
MOL	Maximum Overall Length	3.74±0.04	102.0±1.0

Dimensions are for reference only



770-559-0750

info@LEDLightTech.com

www.LEDLightTech.com



4628 West Skyhawk Drive, West Jordan, UT 84084-4501

Phone 877.236.4403 Fax 801.256.9287

www.DynastyLEDs.com



ISO 9001 CERTIFIED
Patent #6,465,961, #6,634,770,
#6,746,885, #7,728,345 and patents pending