

A19/A60 Omni Lamp

Patented design houses an integrated LED system for optimum lifetime performance. Excellent optics create a uniform beam, delivering lumen output comparable to conventional sources. Free of harmful UV and IR emissions.

Specifications:

Equivalent Source: 40W & 60W Incandescent

L70 lumen depreciation: 50,000 hours

Housing: Anodized Aluminum

Socket: E26 Edison base (US)

Operating Temperature: -20°C to +40°C


MOL: 4.284 in, 108.82mm

Voltage: 120VAC

Weight: 5.6 oz., 159g

Power Factor: ≥.90

Warranty: 5 year limited

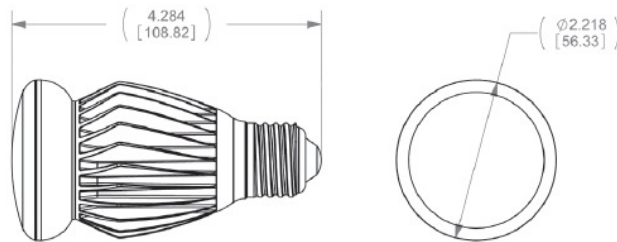

Specifications supplied are nominal. Please refer to the DOE's Lighting Facts Tolerance Guidelines.
¹ Values are nominal.
² See dimmer compatibility chart page on next page.

Benefits

- Dimmable to 5% of light on most dimmers.
- Energy Star compliant, Omni-directional design
- 8/ 13.5 Watts – 80% more efficient than comparable
- 40/60 Watt Incandescent lamps.
- Maintenance free operation, lasts over 50 times longer than conventional lighting.
- RoHS compliant – contains no mercury or lead.

NORTH AMERICAN CERTIFICATIONS



EUROPEAN CERTIFICATIONS



ENVIRONMENT



DIMMER CAPABILITIES

Make	Model
Ace	34050, 3027596
Leviton	6633-PL, 6684, 6631, IPI06-ILX
Lutron	S-600PR-WH, DV-600PR-WH, TG-600PR-WH, AY600P, Q600P, GL600, CN-600PHW, DV-603PG, S-600, S-600P, LG-600P, D-600PH, TT-300NLH, TG-603PG, DVCL-153P, RRD-10ND, SZ-6ND, HW-RPM-4A-120, HxD-6ND, QSG-6P, LP-RPM-4A-120, PHPM-WBX
Legrand	DrRD4W

Cautions

- Turn power off before inspection, installation, or removal.
- Risk of Electric Shock – Do not use where directly exposed to water or weather.
- Suitable for Damp Locations.
- Not for use with AC transformers.
- Do not open – no user serviceable parts inside.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.
- Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

Product Order Code:

Order Code Example: LLT-5-A19O-8-3000-120

LLT	5				
		A19O	8 (Standard Output)	2700	120
		A60O	13.5 (High Output)	3000	230
				4000	
				5000	

***Specifications may be customized to meet customer needs.**