

LowBay

The Lowbay Light combines superior performance and energy-efficiency with a low-profile modern design, the Lowbay Light provides excellent color rendering for enhanced visibility and safety. The LowBay's round distribution provides for uniform illumination at lower mounting heights, with a lower cost per delivered lumen over the life of the installation.

Specifications:

Lumen Output: 5300/5600

Wattage: 71

Efficacy (lm/w): 75/78 (lm/w)

Color Temperature (CCT): 4000K, 5000K

Color Rendering Index (CRI): 70 (4000K), 65 (5000K)

Rated Life L70: 60,000 Hours @ 40°C

Housing: Low Copper Cast Aluminum

Optical Distribution: Type V Round Distribution

Operating Temperature: -30°C to +40°C

Voltage: 120-277 VAC @ 50-60 Hz

Weight: 20 lbs

Standard Finish: White, Bronze Silver, Gray,
Metallic Silver

Warranty: 5 Year Limited



Certification:



Environment:



Dimensions

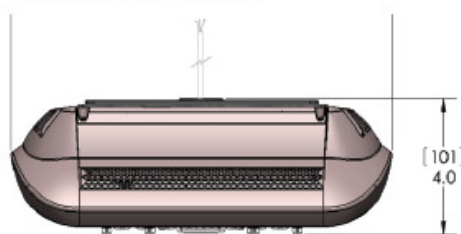

Benefits

- Compact size for small spaces and unobtrusive aesthetics
- High lumen output
- Adaptable - easily change optical distributions
- Fits most traditional mounting options
- Lower cost per delivered lumen
- Low-profile modern design
- Excellent color rendering for enhanced visibility and safety
- Typical Applications Include:
 - Warehouses
 - Stock Rooms
 - Refrigerators
 - Canopy
 - Gas Stations
- Parking Garages

Optic	IES BUG Rating			Input Watts	4000K CCT				5000K CCT				Total Current @ 120V	Total Current @ 240V	Total Current @ 277V	L70 Life (hrs)*	
	B	U	G		Delivered Lumens	Efficacy (LPW)	CRI	Power Factor	Delivered Lumens	Efficacy (LPW)	CRI	Power Factor				Ø 25'	Ø 40'
	R5	3	1		1	71	5302	75	70	≥.9	5696	80				67	≥.9

Product Order Code:

Order Code Example: LLT-5-LB-CW-P1-R5-MVOLT-CLR-PND-BLK

LLT	5	LB		P1	R5	MVOLT	CLR		
								Mounting	Finish
			CW					PND	W
			NW					SRF	BZ
									S
									G
									MS