






# Shoebox Fixture

The ShoeBox, is a versatile distinct LED-based light that provides designers unlimited options to illuminate and enhance architecture for exterior area lighting applications. Clean, sophisticated lines blend seamlessly with architectural elements creating glare free, low maintenance light for general illumination needs.

The light weight, low footprint aluminum fixture and wide range power supply is easy to install since no special ballast or voltage source is required. Versatile design allows for numerous mounting options.



## Features<sup>1</sup>

Rated Life	L70	50,000 Hours 70% Lumen Maintenance
Housing	Included Standard	Anodized Aluminum Black
Lens		Clear Polycarbonate
Optical Distribution		Type V, Full Cutoff
Mounting Options		Square, Round or Wood Pole
Dimensions		14.120" x 16.143" x 5.607" 359mm x 410mm x 142.4mm
	w/Mounting Bracket	14.120" x 22.143" x 5.607" 359mm x 562.4mm x 142.4mm
Operating Temperature		-40°C to +40°C except as noted <sup>2</sup>
Voltage		100-277 Volts AC @ 50-60 Hz
Weight		29lbs
Rated Input		120V - 0.5A 277V - 0.25A
Rated Power		> 0.9
Off State Power		Zero
Warranty		5 Year Limited
Certification		   
Environment		IP66 

	V1	V2	V3 <sup>2</sup>	V4
Lumen Output	6,760	7,400	11,260	4,000
Input Power	86W	86W	150W	50W
Efficacy (lm/W)	79	86	77	78
Color Temperature (CCT)	6000K	5000K	5000K	5700K
Color Rendering Index (CRI)	75	70	70	70

<sup>2</sup>UL Pending


<sup>1</sup> All values are nominal. Values based on 5000CCT at 25°C unless noted. Consult website for complete IES & LM-79 data.

<sup>2</sup> -10°C to +40°C for 120V, -30°C to +40°C for 230V and 277V


**Product Order Code:**

Order Code Example: LLT-5-SB-CW-V1-CLR-BLK

LLT	5	SB	CW	Version	Lens	Finish
				V1	CLR	BLK (Black)
				V2	CLC	BZ (Bronze)
				V3		GR (Grey)
				V4		

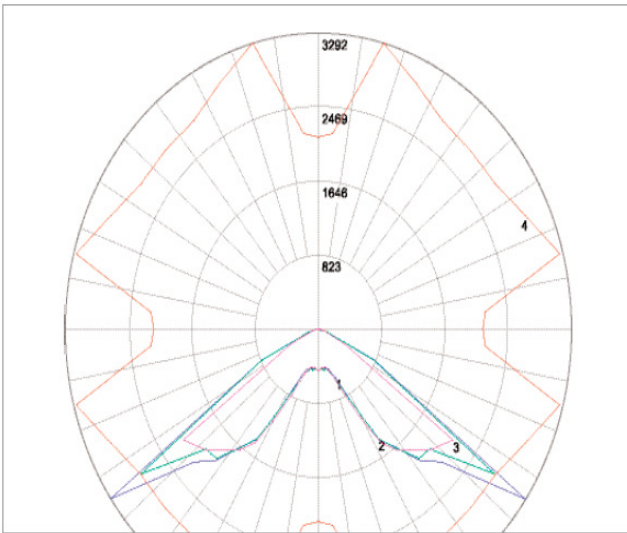

Maximum Candela = 3292 Located At Horizontal Angle = 75, Vertical Angle = 55  
 # 1 - Vertical Plane Through Horizontal Angles (75 - 255) (Through Max. Cd.): BLUE  
 # 2 - Vertical Plane Through Horizontal Angles (45 - 225): GREEN  
 # 3 - Vertical Plane Through Horizontal Angles (0 - 180): MAGENTA  
 # 4 - Horizontal Cone Through Vertical Angle (55) (Through Max. Cd.): RED

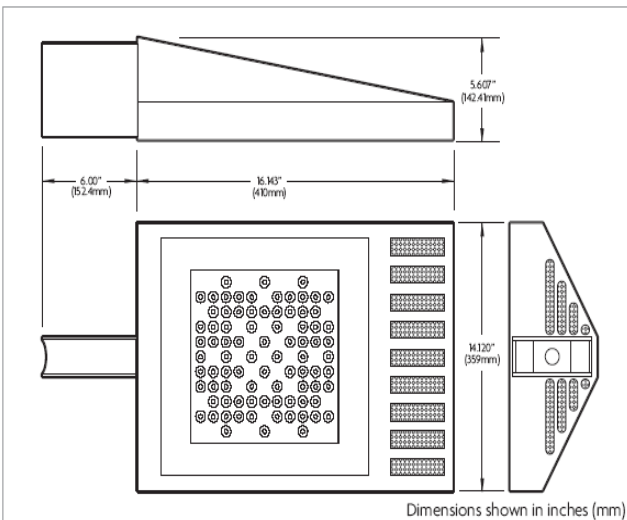

**Luminance Data (cd/sq.m)**

Angle In Degrees	Average 0°	Average 45°	Average 90°
45°	45,525	46,208	44,519
55°	71,030	79,408	72,833
65°	28,933	66,191	36,971
75°	8,259	12,252	9,669
85°	7,067	9,014	8,957

**Zonal Lumen Summary**

Zone	Lumens	% Fixt
0-30	532.5	7.9
0-40	1,435	21.2
0-60	5,166	76.4
0-90	6,764	100
60-90	1,598	23.6
0-180	6,765	100

**Mounting Hole Template**

