

Wall Pack

The WallPack luminaire provides excellent perimeter and security lighting. This versatile and distinct LEDbased wallpack provides unlimited options to illuminate and enhance exterior and interior applications. Clean, sophisticated lines blend seamlessly with architectural elements. The Wallpack's lightweight, low footprint aluminum fixture and wide power range is easy to install since no special ballast or voltage source is required. This easy to install design allows for simple surface mount installations.

Specifications:

Lumens: Cool White 3340

Input Power: 60 Watts

Efficacy: Cool White 56 (lm/w)

Color Temperature (CCT): Cool White 6500K

Color Rendering Index (CRI): Cool White 77

Rated Life: 50,000 Hours

Housing: Aluminum

Lens: Flat Tempered Glass

Mounting Options: Surface Mount

Dimensions: 15.43" x 9.26" x 4.78" 392mm x235mm
x121mm

Operating Temperature: -40°C to +40°C

Voltage: 100-277 Volts AC @ 50-60 Hz

Rated Input Power: High Ultra High

120V	0.43	0.5
------	------	-----

277V	0.19	0.2
------	------	-----

Rated Power Factor: >0.9

Offstate Power: Zero

Weight: 15lbs


Warranty: 5 Year Limited



Benefits

- Up to three times longer life at approximately half the energy consumption of conventional sources.
- Significantly longer life leads to reduced maintenance and material costs.
- Good color rendering for enhanced visibility and safety.
- Instant on/instant re-strike.
- Typical Applications Include:
 - Perimeter and security lighting for industrial and commercial buildings


WallPack

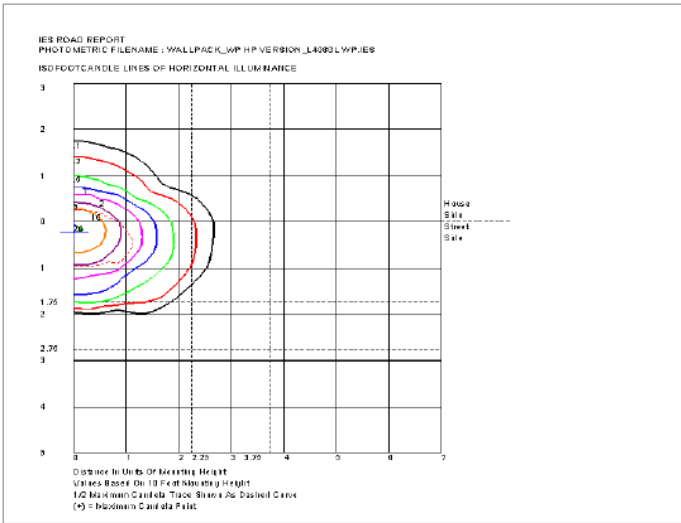

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Fixt
0-30	1343	40.3	N/A
0-40	2038	61.1	N/A
0-60	3084	92.4	N/A
60-90	251.6	7.5	N/A
0-90	3335	100	N/A
0-180	3337	100	N/A

Occupancy Sensor Sensitivity Range Information Pending
 Please contact a Representative

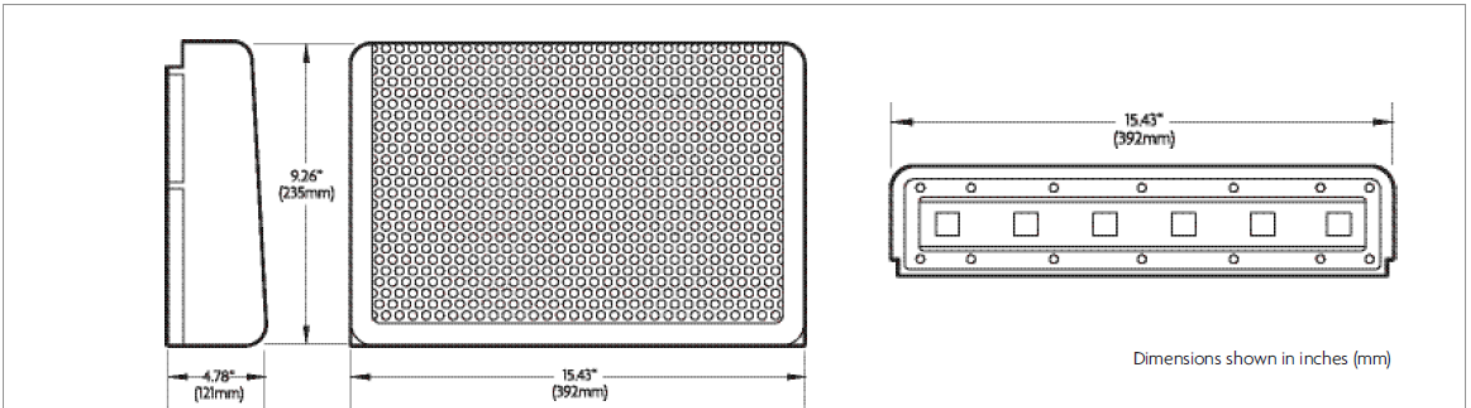

Product Order Code:

Order Code Example: LLT-5-WP-CW-UH-S-CLR-BLK

LLT	5	WP	CW	Ultra High	Surface		
						Lens	Finish
						CLR	BLK (Black)
						CLC	BZ (Bronze)
							WH (White)
							SL (Silver)
							C (Custom)