

# LuxemBright™ LED Flex

## LuxemBright® LED Flex System

The LuxemBright® LED Flex system is designed to be a direct neon replacement for exposed neon, architectural bordering, interior design, and other signage applications. This product only consumes 0.2 to 1.6 watts per foot, saving energy compared to traditional neon glass that can consume up to 8.0 watts per foot. The LuxemBright® LED Flex system is also easy to install and transport, and is RoHS compliant, whereas traditional neon glass is known for breaking and containing harmful materials. Don't take the gamble of using a different system. By using LuxemBright®, you know your signage application will keep glowing!



Installations using LED flex rope.

## Applications

- Exposed Neon
- Architectural Bordering
- Interior Design
- Signage

## Features

- Water Resistant
- Vibration Resistant
- High Lumen Output
- 120 VAC Input, Low Voltage Output
- Superior Performance in Outdoor Environments
- Cut and Splice Every 18 or 30 Inches
- Available in Cool White, Warm White, Red, Yellow, Blue, Green, and Orange


## Benefits

- Long Life: 40,000-60,000 Hours Lifetime
- Environmentally Friendly
- Energy Efficient: Consumes 0.2-1.6 Watts Per Foot
- Non-Hazardous Waste
- UL Listed, CE Approved, RoHS Compliant



The LuxemBright® LED Flex system provides the brightest and latest technology exceeding the performance, durability, safety, flexibility, and energy efficiency of traditional neon glass and other similar LED lighting products. This patented technology is UL listed with the UL symbol stamped on every section. The LuxemBright® LED Flex system can run up to 160 feet on a single 110 power cord! The rope is made of a durable PVC shell that effectively disperses light and avoids hot/dark spots. This system is virtually unbreakable, waterproof, impact resistant, and can also easily be moved and re-installed. Can be cut every 18 or 30 inches allowing for easy installation.

Patented Technology

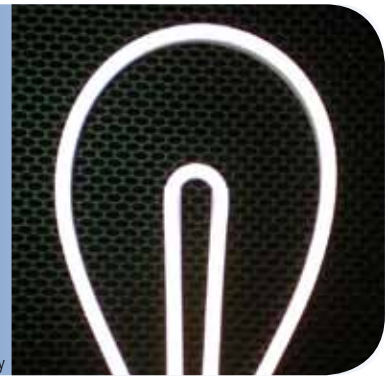

## LUXEMBRIGHT® LED FLEX SYSTEM

PRODUCT DESCRIPTION	PRODUCT NUMBER	WATTS PER FOOT	FEET PER ROLL	CUTTABLE LENGTHS (INCHES)	MAX LENGTH PER POWER CORD (FT)	LIMITED WARRANTY (YEARS)
PLUS WHITE	775-W0013	1.60	150	18	120	3
PLUS WARM WHITE	775-W0014	1.60	150	18	120	3
FLEX PLUS RED	775-R0013	1.20	150	30	160	3
FLEX PLUS YELLOW	775-Y0013	1.20	150	30	160	3
FLEX PLUS ORANGE	775-E0013	1.20	150	30	160	3
FLEX PLUS GREEN	775-G0013	1.60	150	18	120	3
PLUS BLUE	775-B0013	1.60	150	18	120	3
COLOR JACKET PLUS RED	775-R0023	1.20	150	30	160	3
COLOR JACKET PLUS YELLOW	775-Y0023	0.96	150	30	160	3
COLOR JACKET PLUS ORANGE	775-E0023	1.20	150	30	160	3
COLOR JACKET PLUS GREEN	775-G0023	1.20	150	18	120	3
COLOR JACKET PLUS BLUE	775-B0023	1.20	150	18	120	3
BASIC RED	775-R0033	0.37	150	30	160	1
BASIC YELLOW	775-Y0033	0.20	150	30	160	1
BASIC GREEN	775-G0033	0.30	150	18	120	1
BASIC BLUE	775-B0033	0.30	150	18	120	1
NEON FLEX JUMPER - 6 INCH	775-00001	-	-	-	-	-
NEON FLEX JUMPER - 1 FOOT	775-00002	-	-	-	-	-
NEON FLEX JUMPER - 2 FOOT	775-00003	-	-	-	-	-
NEON FLEX JUMPER - 4 FOOT	775-00004	-	-	-	-	-
NEON FLEX JUMPER - 6 FOOT	775-00005	-	-	-	-	-
POWER CORD - STRAIGHT - 1.6A	775-00006	-	-	-	-	-
POWER CORD - 90° - 1.6A	775-00007	-	-	-	-	-
POWER CORD - LEFT 90° - 1.6A	775-00008	-	-	-	-	-
POWER CORD - RIGHT 90° - 1.6A	775-00009	-	-	-	-	-
X CONNECTOR	775-00010	-	-	-	-	-
L CONNECTOR	775-00011	-	-	-	-	-
T CONNECTOR	775-00012	-	-	-	-	-
MOUNTING CHANNEL - 2 METER	775-00013	-	-	-	-	-
MINI CHANNEL - 5CM	775-00014	-	-	-	-	-

Distributed by:



**LED Light Technology**  
 1004 Bay Tree Lane  
 Duluth, GA 30097  
 O: 770-559-0750  
 F: 770-783-8097  
[www.ledlighttech.com](http://www.ledlighttech.com)



4628 West Skyhawk Drive 801-256-9282 (tel)  
 West Jordan, UT 84084 801-256-9287 (fax)

[www.caogroup.com](http://www.caogroup.com)

U:1 C:3 SAL-BR0003 VER 080901 ECN 02.00017

ISO 9001 CERTIFIED  
 TS 16949 CERTIFIED FACTORY