




LED Light Technology, LLC
 1004 Bay Tree Lane
 Duluth, Georgia 30097

A Female Owned Company

Tele: 770-559-0750
 Fax: 770-783-8097
 www.LEDLightTech.com

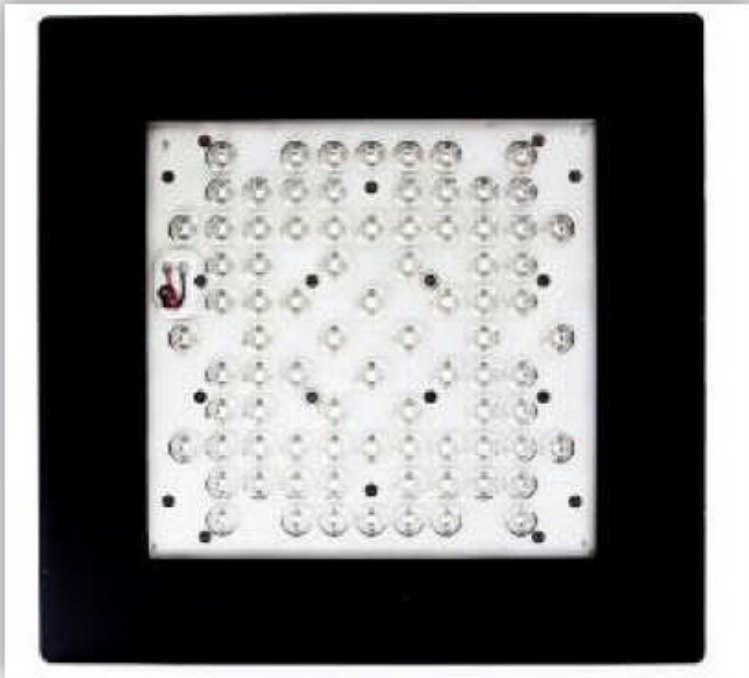

Benefits

- Up to three times longer life at approximately half the energy consumption of conventional sources.
- Significantly longer life leads to reduced maintenance and material costs.
- Low profile, flat lens to reduce glare.
- Good color rendering for enhanced visibility and safety.
- Choice of mounting options to meet a variety of architectural forms in horizontal and vertical positions.
- Instant on/ instant re-strike.

Flat LowBay

Combining superior performance and energy efficiency with style. Typical applications include warehouse, stockroom, parking garage and other large volume facilities requiring wide distribution of glare free, low maintenance light.

Mounting options include pendant, surface or sloped conditions. The wide range power supply does not require special ballast or voltage considerations.

Features



Lumen Output	6760
Input Power	86 Watts
Efficacy	79 (lm/w)
Color Temperature (CCT)	6145K
Color Rendering Index (CRI)	75
Rated Life	50,000 Hours
	70% Lumen Maintenance

Controls


Occupancy Sensor	Hi/Low 50% Output Power
Housing	Anodized Aluminum
Included standard	Black
Lens	Clear Polycarbonate
Mounting Options	Surface Mount Pendant Mount

Dimensions	14"x14"x 3.063" w/o PSU
	356 x 356 x 77.8mm w/o PSU
	14"x14"x 6.27" w/ PSU
	356 x 356 x 159.37mm w/ PSU
Power Supply	5" x 4.4" x 1.84"
	127 x 112 x 47mm

Operating Temperature	-40°C to +40°C
Voltage	100-277 Volts AC @ 50-60 Hz
Weight	28lbs w/PSU
Warranty	5 Year Limited

Certification	   
Power Supply	 
Environment	IP66 

Flat LowBay

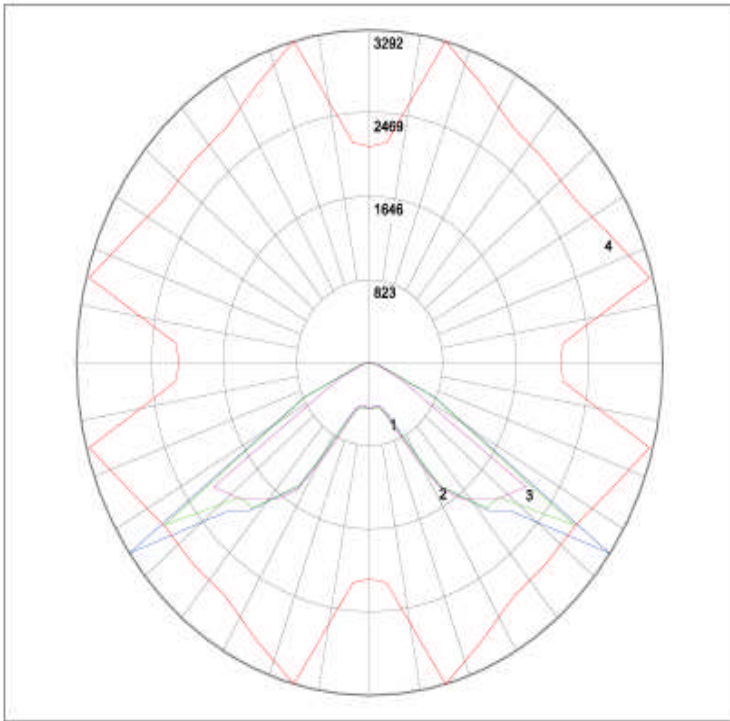


Maximum Candela = 3292 Located At Horizontal Angle = 75, Vertical Angle = 55
 #1 - Vertical Plane Through Horizontal Angles [75 - 255] (Through Max. Cd.): BLUE
 #2 - Vertical Plane Through Horizontal Angles [45 - 225]: GREEN
 #3 - Vertical Plane Through Horizontal Angles [0 - 180]: MAGENTA
 #4 - Horizontal Cone Through Vertical Angle [55] (Through Max. Cd.): RED

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0°	Average 45°	Average 90°
45°	45,525	46,208	44,519
55°	71,030	79,480	72,833
65°	28,933	66,191	36,971
75°	8,259	12,252	9,669
85°	7,067	9,014	8,857

Zonal Lumen Summary

Zone	Lumens	% Fixt
0-30	5325	7.9
0-40	1435	21.2
0-60	5165	76.4
0-90	6764	100
60-90	1598	23.6
0-180	6764	100.0

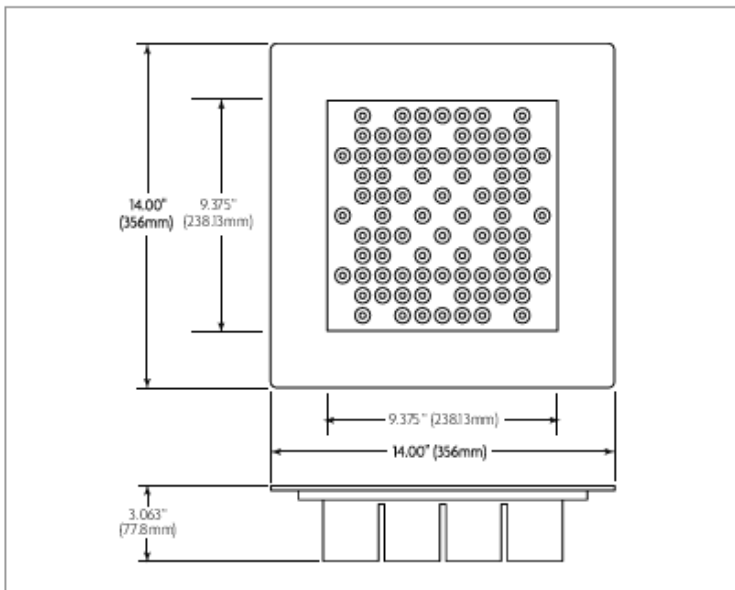

Dimensions shown in inches (mm)

