

LED Light Tech™

2x4 LED Recessed Troffer

LED Light Technology's LED Recessed Troffer is a offers a stunning exterior finish in matte white best used in offices, hospitals, and indoors. It has an outstanding luminous efficacy of more than 95 lm/W.


SPECIFICATIONS:

- Wattage: 50W
- Input Voltage: 100-277 VAC/0.5A
- Luminous efficacy: Typ.115lm/W
- Lumens: 5700lm
- CCT: 4000, 5000 K
- CRI: >85
- L70 lifetime: >156,000 hours
- Power Factor: >0.95
- THD: /<17%
- 0-10 V Dimmable
- Certificates/ Ratings



FEATURES AND BENEFITS:

- Available Dual Function Sensors: Motion & Photocell
- Maintenance Free & Environmentally Friendly (No Mercury Used)
- Dusk-To-Dawn Occupancy Control Compatible
- ES LM80 Tested LED
- LM79 Data & IES Files Available
- 0-10V Dimming Title 24 Compliant

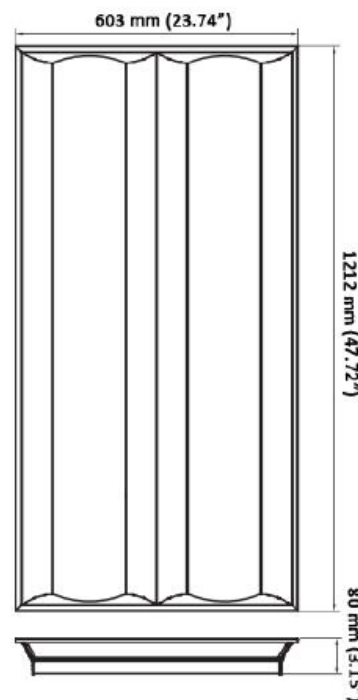

CONSTRUCTION:

Constructed in a heavy-duty sheet metal and PC diffuser, in addition, to frosted lenses for appropriate glare prevention and maximized brightness.

FINISH:

Luminaire coated in an environmentally friendly polyester powder formulated for a durable and long-lasting color in a matte white finish. No toxic heavy metals, VOC, or mercury were used in the design of this product.

MOUNTING:

Suitable for surface and recessed mount.

TESTING AND CERTIFICATIONS:

All luminaires have been tested by an independent laboratory in accordance with IESNA LM79 and LM80. Product certifications include: DLC, ETL, Title 24, RoHS, Lighting Facts, and Safety Listing.

OPTIONS AND CONTROLS:

Luminaire is compatible with all 0-10V dimming systems and sensors including: dual function, KO, and backup sensor.

WARRANTY:

Industry-leading L70 rated lifetime of over 94,000 hours with five (5) year warranty.

REGULATORY & VOLUNTARY QUALIFICATIONS
Design Lights Consortium
CE, RoHS
UL/cUL, KEMA, and CE certified external driver
LM79, LM80, Lighting Facts

LED Light Technology, LLC
1004 Bay Tree Lane
Duluth, Georgia 30097



Tele: 770-559-0750
Fax: 770-783-8097
www.LEDLightTech.com

PRODUCT ORDER CODE:

Product Order Code Example: LLT-35-RT2x4-50-4

LLT	35	RT2x4	50	
				CCT
				Custom Colors Available
				4=4000
				5=5000

