


LED Light Tech™ LED Recessed Canopy Fixture

LED Light Technology's LED Recessed Canopy provides the easiest retrofit solution for a recessed canopy with no structural changes. This energy efficient fixture can save 60% more energy than traditional lighting. Energy efficiency combined with low maintenance costs provide low total cost over the lifetime of the luminaire. The LED Recessed Canopy provides up to a superlative luminous flux of 13,000 lm and only consumes approximate 150 watts. Applications include fuel stations, shopping malls, parking lots, warehouses, exhibition halls, and storage areas.

SPECIFICATIONS:

- Luminous efficacy: 86 lm/W
- Lumens: 8600 lm, 13,000 lm
- CCT: 5000 K
- L70: 100, 000+h
- CRI: 80
- PF/THD: >0.92/<20%

DIMENSIONS (IN MM):

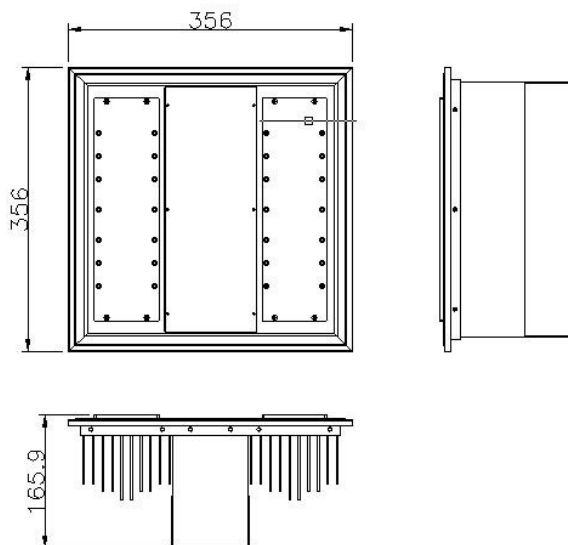

| CONSTRUCTION & MATERIALS | | |
|-------------------------------------|---|--------------|
| Type | 100 W | 150 W |
| Dimension | 356*356*165.9 mm (14.02*14.02*6.53 inch) | |
| Housing | Die-cast Aluminum | |
| Finish Color | Silver/ White | |
| Lens Type | Modular Optic | |

| ENVIRONMENTAL SYSTEM | |
|-----------------------------|------------------------|
| Work Environment | Indoor and outdoor use |
| Operating Temperature | -20~50°C (-4~122°F) |

| OPTICAL SYSTEM | | |
|-----------------------|--------------|--------------|
| Type | 100 W | 150 W |
| Luminous Flux | 8600 lm | 13,000 lm |
| Luminous Efficacy | 86 lm/W | |
| Color Temperature | 5000 K | |
| CRI | 80 | |

| ELECTRICAL SYSTEM | |
|--------------------------|----------------------|
| Input Voltage/Current | 100-277 VAC 50/60 HZ |
| Power Consumption | 100 W, 150 W |
| Power Factor | >0.92 |
| THD | <20% |

| REGULATORY & VOLUNTARY QUALIFICATIONS |
|--|
| DLC pending |
| ETL/cETL pending |
| UL/cUL, and CE certified external driver |

PRODUCT ORDER CODE:

Product Order Code Example: LLT-35-RCP-150-5000

| LLT | 35 | RCP | | 5000 |
|-----|----|-----|--------------|------|
| | | | Watts | |
| | | | 100 | |
| | | | 150 | |

